




- Superior Smoke Odor Blocking
- Superior Stain Blocking
- Superior Priming Capabilities

SMOKE ODOR SEALER

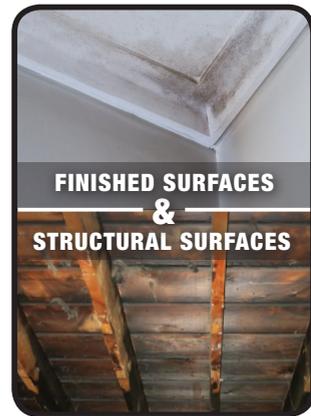

Universal Restoration Primer/Sealer

Permanently Encapsulates Smoke Odors On
Structural, Finished and Decorative Surfaces



EASILY
ACCEPTS
TOPCOAT



PREMIUM
STAIN
BLOCKER



MOISTURE
PERMEABLE
FINISH

For Technical Information call 800.342.3755

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither ICP Construction, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of this product, for each specific project and for the health and safety of personnel working in the area.

For additional information check Safety Data Sheet (SDS) or Product Data Sheet (PDS) available online at www.fiberlock.com.

Fiberlock, the Logo and other marks on this label are trademarks of ICP Construction, Inc.

For Professional Use Only

3092 White

126 FL OZ
3.73 L

ULTRA RECON Smoke Odor Sealer is a revolutionary finish grade, solvent free smoke odor sealer and stain blocker designed to encapsulate malodors on multiple surfaces and block tough staining. ULTRA RECON Smoke Odor Sealer with OdorLock Plus technology is water based and does not contain flammable solvents. Unlike typical water based coatings that "wick" smoke odors and stains out of the substrate as they dry, ULTRA RECON Smoke Odor Sealer with OdorLock Plus technology prevents smoke odors and stains from migrating through the coating, it also contains specialized malodor neutralization technology. This multiphase technology provides one coat odor control on most surfaces and continues to block odors even with seasonal changes in temperature and humidity. ULTRA RECON Smoke Odor Sealer (Ultra SOS™) is your final step to encapsulate residual odors typically found on fire damage restoration projects.

SURFACE PREPARATION

Warning! If you scrape, sand, or remove old paint from any surface, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH approved respirator to control lead exposure. Carefully clean up with a wet mop or HEPA vacuum. Before you start, find out how to protect yourself and your family by contacting the U.S. EPA/Lead Information Hotline at 1-800-424-LEAD (5323) or log on to www.epa.gov/lead.

Prior to applying Fiberlock's ULTRA RECON Smoke Odor Sealer (Ultra SOS™) it is critical that the substrate be thoroughly cleaned. Smoke odor encapsulation is a final step that needs to be part of a comprehensive smoke/odor management protocol. This protocol should include the following steps: Odor Cleaning, Odor Neutralization and Odor Encapsulation.

Fiberlock recommends cleaning with RECON Heavy Duty Cleaner or Extreme Duty Cleaner, followed by the application of ULTRA RECON Extreme Duty Odor Counteractant. After the substrate is clean, dry and sound apply ULTRA RECON Smoke Odor Sealer to encapsulate any residual odors that remain.

APPLICATION TOOLS

Apply ULTRA RECON Smoke Odor Sealer with a roller or airless spray equipment.

Brush: Synthetic, nylon or polyester bristle
Roller: 3/8" Nap Synthetic Fiber
Spray Settings:
Pressure: 2000-3000 P.S.I.
Tips: .015 to .021 tips

PRODUCT APPLICATION

Apply ULTRA RECON Smoke Odor Sealer generously and uniformly by brush, airless spray or roller. Apply one coat of ULTRA RECON Smoke Odor Sealer and ensure that the finished surface is properly sealed. Two-coats may be required on some porous or heavily stained surfaces. Topcoat floor applications when foot traffic or heavy storage is expected. ULTRA RECON Smoke Odor Sealer is tintable up to 2 oz. of universal liquid colorant per gallon. Can be directly applied to wallboard, sheetrock, wood, masonry and concrete. Ferrous metals may require a DTM primer to prevent flash rusting. Topcoat with water or oil-based paints. Not for use in HVAC systems.

COVERAGE

Smooth Surfaces: 200-400 ft²/gal.
Porous Surfaces: 100-200 ft²/gal.

DRYING TIME @ 70°F 50% R.H

To Touch: 30 Min.
Recoat: 2 Hours
Topcoat: 2 Hours

CLEANUP

Clean tools and drippings with warm soapy water before ULTRA RECON Smoke Odor Sealer dries. Dispose of waste according to all existing local, state and federal regulations.

PRECAUTIONS

Store in a dry place at temperatures between 40°F (4.5°C) and 90°F (32°C). Stir thoroughly. Do not mix with any other coatings, solvents or colors in oil. Do not apply when air or surface temperature is below 55°F, or when drying conditions are poor or when surfaces are above a 15% moisture level content. In areas with high humidity, apply when surface temperature is 60°F or higher. Use adequate ventilation during application. When applying with a sprayer, wear a NIOSH approved respirator with any R, P, N or HE filter. For interior use only.

CAUTION!

KEEP OUT OF REACH OF CHILDREN.

Do not take internally. Close container after each use.
Keep from freezing.
24 hour Emergency "CHEM-TEL" - 1-800-255-3924

CAS. No.:
7732-18-5
13463-67-7
Not available*

CHEMICAL INGREDIENTS:
Water
Titanium dioxide
Latex resin solids

*Contents partially unknown

Calculated VOC: 49 g/l

WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

WARNING:



Hazard Statements:

Harmful if inhaled.
Causes serious eye irritation.
May cause an allergic skin reaction.

Precautionary Statements:

Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protection (eye protection, gloves) during application. When grinding/sanding dry films, wear respiratory protection.

Response: If on skin, wash with plenty of soap and water. If in eyes, rinse cautiously for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. If inhaled, remove victim to fresh air. If exposed or concerned, get medical advice.

Storage: Keep closures tight and containers upright to prevent leakage. KEEP FROM FREEZING. Product is non-combustible.

Disposal: The coating and any contaminated diking material should be thoroughly air dried and collected into drums. The drums should be sealed and labeled and land-filled or incinerated according to local, regional and national regulations.

Emergency Tel. No.: CHEM TEL: (U.S.): 1-800-255-3924 (Outside the U.S.): 813-248-0585



3092-1 White



150 Dascomb Rd.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com