

Piranha 8 is a low odor, alkaline paste paint stripper that liquefies paints on a variety of substrates. Piranha 8 removes most paints, varnishes, and water-based latex paints from metal, stone, concrete, brick, wood, marble, and plaster. Piranha 8 can remove multiple coats safely and easily in a single application. Piranha 8 is particularly well suited for stripping lead based paints. **SURFACES MUST BE NEUTRALIZED AFTER USING PIRANHA 8. FAILURE TO PROPERLY NEUTRALIZE SURFACES TREATED WITH PIRANHA 8 CAN RESULT IN SUBSEQUENT COATING FAILURE OR RESULT IN A HAZY RESIDUE ON EXPOSED SURFACES.**

SURFACE PREPARATION: Warning! If you scrape, sand, or remove old paint from any surface, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH approved respirator to control lead exposure. Carefully clean up with a wet mop and HEPA vacuum. Before you start, find out how to protect yourself and your family by contacting the U.S. EPA/Lead Information Hotline at 1-800-424-LEAD(5323) or log on to www.epa.gov/lead.

Application is not recommended when substrate temperature is below 40°F. Ideal working temperatures are between 60°-70°F. Avoid direct sunlight. Always perform test patches on areas to be stripped to be certain you will achieve a satisfactory outcome. Stir Piranha 8 with a paddle or electric mixer prior to spraying. As much as one pint of water can be added to a pail of Piranha 8 to improve its flowing characteristics. Surface must be cleaned and free of loose particles, grease, and dust before applying Piranha 8.

APPLICATION TOOLS: Piranha 8 can be effectively applied using a trowel, brush or specialized airless sprayer with corrosion resistant contact points for handling aggressive caustics.

TOOLS: **Brush:** Synthetic, nylon or polyester bristle
Spray: .031 to .035 tip



PRODUCT APPLICATION: For best results, test a small area to determine the appropriate application thickness and dwell time required to most effectively remove the paint. Dwell times can take up to 24-48 hours. Apply a coat approximately 1/16"-1/4" depending on thickness of paint. The use of a polyethylene sheeting cover can result in better results. Use caution when working on plaster, caustic may deteriorate the surface. Not recommended for use on veneer, plywood, aluminum, two-part epoxy or urethane. May cause damage to composition moulding. May darken hardwoods.

REMOVAL: When paint has been liquefied, scrape off small areas at a time. Then use a bristle brush and water to clean off all residue remaining on the surface. Be sure all crevices, grooves and cracks are thoroughly cleaned. Do not let residue dry. If necessary, mist surfaces to keep surfaces moist until a thorough cleaning can be completed. **Neutralization is required, pH levels should be verified prior to repainting. When removal and cleaning has been completed allow area to dry for at least 24 hours before proceeding with neutralization. Failure to neutralize may interfere with the performance of future paint coatings or result in a hazy residue on exposed substrates.** Drying times for woods (redwood, cedar, etc.) varies from 40-100 days. Monitor carefully. To avoid bleeding and moisture retention, use a primer that retards and seals.

When washing off or scraping off Piranha 8 be careful not to come in contact with items that are sensitive to high alkalinity. Protect unaffected areas with polyethylene sheeting and masking tape.

CLEANUP: Clean tools and drippings with warm soapy water. Properly dispose of all waste according to current Local, State and Federal regulations. Keep Container closed when not in use.

CAUTIONS: NON FLAMMABLE. MAY BE FATAL IF SWALLOWED, INHALED OR INGESTED. MAY CAUSE SEVERE BURNS, CONTAINS SODIUM HYDROXIDE. TO PROTECT EYES

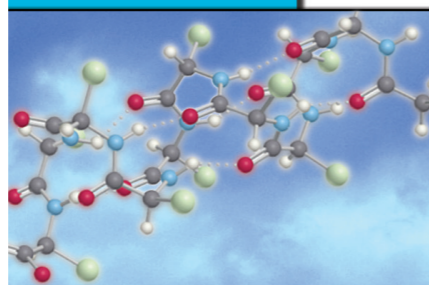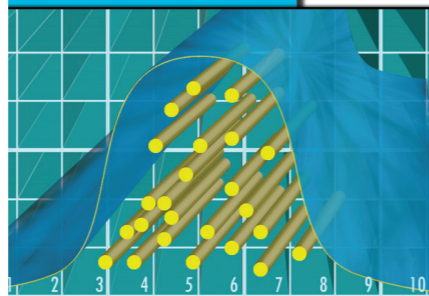

QUALITY

KNOWLEDGE

SCIENCE

WARNING! WEAR EYE AND SKIN PROTECTION WHEN USING THIS PRODUCT. SEE CAUTIONS AND SAFETY INFORMATION ON BACK PANEL.

FOR PROFESSIONAL USE ONLY
5 U.S. Gallons(18.925 Liters) Net

FIBERLOCK
TECHNOLOGIES

PIRANHA®

Professional Paint Removers

8

MULTI LAYER PAINT & VARNISH REMOVER

5780

www.fiberlock.com

WEAR PROTECTIVE GOGGLES OR FACE SHIELD. TO PROTECT HANDS AND ARMS USE LONG RUBBER GLOVES. FOR HELP IN CHEMICAL EMERGENCY, CALL 1-800-255-3924. FOR SALE TO, USE AND STORAGE BY, TRAINED PROFESSIONALS ONLY. HAVE RUNNING WATER NEARBY AT ALL TIMES. CONTRACTOR ASSUMES ALL RISKS AND LIABILITIES.

Normal ventilation required. Protect all surfaces not being stripped with polyethylene sheeting. For interior use, open windows and doors or use other means to assure a constant supply of fresh moving air during use. Ideal working temperature is between 60°-70°F. Protective clothing must be worn. Wear long rubber gloves taped to the sleeves. Wear eye protection at all times. Face and head protection must be worn when working at face level or overhead. Keep clean water near work area. May be fatal if swallowed, inhaled or ingested.

FIRST AID: For skin irritation, wash with soap and water immediately. If irritation persists, seek medical attention. In case of eye contact, flush thoroughly with water. Get medical attention. If ingested, drink water or milk and seek medical attention. Never give anything by mouth to an unconscious person. Refer to the Material Safety Data Sheet (MSDS) available from your distributor or at www.fiberlock.com for further safety and handling instructions.

VOC COMPLIANT: Use as directed for safety and to aid in meeting OSHA and EPA Requirements. Dispose of empty containers in accordance with federal, state, and local regulations.

COVERAGE (Dependent on application thickness):
1/4" = 6.4 ft2 per gallon
1/8" = 12.8 ft2 per gallon
1/16" = 25.6 ft2 per gallon

CAS. No.: **CHEMICAL INGREDIENTS:**
1310-73-2 Sodium hydroxide
1305-62-0 Calcium hydroxide
1309-42-8 Magnesium hydroxide
7732-18-5 Water

CAUTION!
KEEP OUT OF REACH OF CHILDREN.
FOR PROFESSIONAL APPLICATORS ONLY!

Do not take internally. Close container after each use. Keep from freezing.
24 hour Emergency "CHEM-TEL" Phone: 1-800-255-3924

DISCLAIMER: These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither Fiberlock Technologies, Inc., nor its agents shall be responsible for the of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of Piranha 8 for each specific project and for the health and safety of personnel working in the area. For additional information and/or precautions check Material Safety Data Sheet (MSDS) or Product Data Sheet (PDS) available online at www.fiberlock.com.

MADE IN THE USA

Manufactured by:
Fiberlock Technologies, Inc.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com