

FIBERLOCK TECHNOLOGIES



COATINGS PRIMERS SEALERS

POWERSTONE™ PLUS

Waterborne Acrylic Surface Conditioner
Interior/Exterior

5489 - Clear

DRYING TIME @ 70°F 50% R.H: To Touch: 1 Hour
To Recoat: 2 Hour

COVERAGE: Coverage depends on thickness and porosity of the material.
Smooth Surfaces: 250-300 ft² per gallon
Porous Surfaces: 200-250 ft² per gallon
Spray coverage: 50% of above.

PRECAUTIONS: Do not mix with other coatings. Do not apply when air or surface temperatures are below 50° or apply to a damp surface. Not recommended as a sealer on glazed, quarry or other ceramic type tiles. Steel troweled concrete must be etched prior to application of Powerstone™ Plus to insure adhesion to the concrete. Smooth concrete with a curing membrane or hardener may require abrasion to obtain proper adhesion.

CLEANUP: Clean up sealer spatters and equipment immediately after use with soapy water.

CAS NO.	Chemical Ingredients
7732-18-5	Water
770-35-4	Propylene glycol phenyl ether
124-68-5	2-Amino-2-methyl-1-propanol
Not avail.*	Proprietary surfactant
Not Avail.*	Acrylic latex resin solids

*Contents partially unknown

CAUTION!


KEEP OUT OF REACH OF CHILDREN.

Do not take internally. Close container after each use. Keep from freezing.
24 hour Emergency "CHEM-TEL" Phone: 1-800-255-3924

DISCLAIMER: These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither Fiberlock Technologies, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of **Powerstone Plus** for each specific project and for the health and safety of personnel working in the area.

For additional information and/or precautions check Material Safety Data Sheet (MSDS) or Product Data Sheet (PDS) available online at www.fiberlock.com


QUALITY

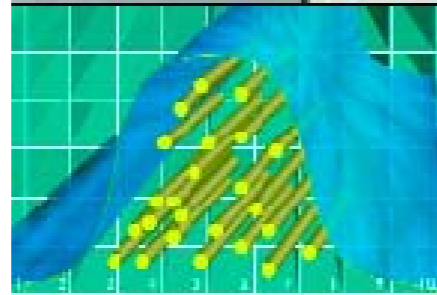

KNOWLEDGE



SCIENCE

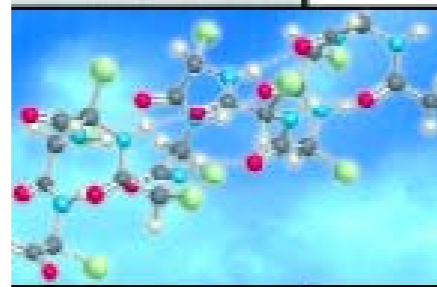

FOR PROFESSIONAL USE ONLY
5 U.S. Gallons (18.925 Liters) Net
Max Allowable VOC Content**: 200
Actual Calculated VOC Content: 132

**Maximum regulatory allowable VOC content for this category of product.

Fiberlock Technologies, Inc.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com