

FIBERLOCK TECHNOLOGIES

IAQ

Mold Remediation Products

9000

MOLD-RESISTANT MASONRY WATERPROOFER

WHITE - 8395


QUALITY



KNOWLEDGE



SCIENCE

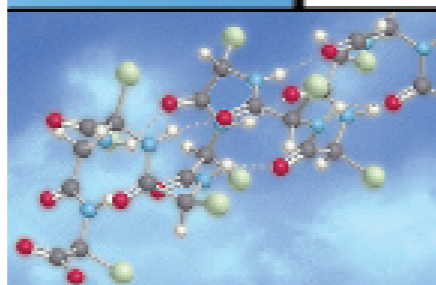

FOR PROFESSIONAL USE ONLY
5 U.S. Gallons(18.925 Liters) Net
Max Allowable VOC Content*: 400
Actual Calculated VOC Content: 156

CLEAN UP: Clean application tools immediately after use in warm, soapy water.

DRYING TIME @ 70°F 50% R.H. To Touch: 2 to 3 Hours
Recoat: 3 Hours

COVERAGE - AVERAGE
Smooth Surfaces- 100-125 ft² per gallon-1st coat 125 ft² per gallon-2nd coat

Porous Surfaces- 75 ft² per gallon-1st coat 125 ft² per gallon-2nd coat

TINTING: May be tinted to light or pastel shades with alkali-proof universal tinting colors. Use only 25% of color normally recommended. Do not use more than 2 fl. oz. of colorant per gallon. **Fiberlock IAQ 9000** is ideal as a finish coat. If desired, a high quality latex paint can be applied after 24 hours for decorative purposes.

CAS. No.:
7732-18-5
111-77-3
85-68-7
25036-16-2
13463-67-7

CHEMICAL INGREDIENTS:

Water
Diethylene Glycol Monomethyl Ether
Butyl Benzyl Phthalate
Styrene Acrylic Resin
Titanium Dioxide

CAUTION!

KEEP OUT OF REACH OF CHILDREN.

Do not take internally. Close container after each use. Keep from freezing.
24 hour Emergency "CHEM-TEL" Phone: 1-800-255-3924
Do not store at temperatures above 100°F.

DISCLAIMER: These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither Fiberlock Technologies, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of **Fiberlock IAQ 9000** for each specific project and for the health and safety of personnel working in the area.

For additional information and/or precautions check Material Safety Data Sheet (MSDS) or Product Data Sheet (PDS) available online at www.fiberlock.com.

*Maximum regulatory allowable VOC content for this category of product.

MADE IN THE USA

Manufactured by:
Fiberlock Technologies, Inc.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com